



SIYING LED

LED Floodlight

Ningbo Siying Optoelectronic Lighting
Science & Technology Co.,Ltd

📍 No.9 Shaozhong Road,East of Industrial Zone, Yuyao,Ningbo,Zhejiang Province,China

☎ +86-574-62026531

✉ david.chen@sy-ledlighting.com

🌐 www.sylight.net




CATALOG 2019

Ningbo Siying Optoelectronic Lighting Science & Technology Co.,Ltd



Technischer Überwachungs-Verein Certificate

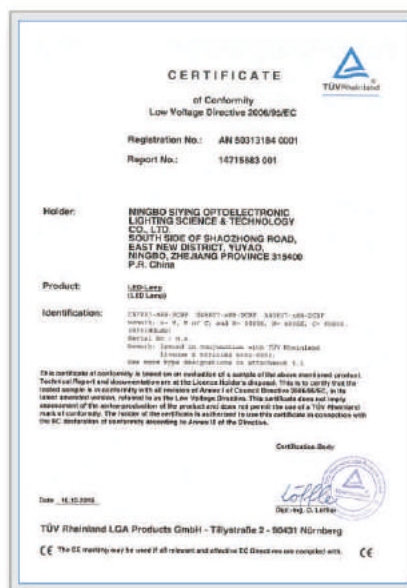

INTRODUCTION

SIYINGLED is located in Yuyao, Ningbo, specialized in producing led light source and led lighting. Factory has more than 500 employees and area more than 20,000 square meters.

The company has passed international standard product authentications in safety assurance including ISO9001, CE, RoHS, GS, SAA, ErP and TUV certification.

Being an OEM/ODM manufacturer, our export percentage is more than 95% and the overseas market extends to Europe, America, Asia, Australia and Africa. With advanced technology, standard workshops and modern management, SIYING always offer our clients a variety of products, ensuring high quality and the best service.

Welcome your visitation!

SIYING LED



ErP




Packaging


We can design a variety of packaging requirements of customers



ErP RoHS SAA BSCI

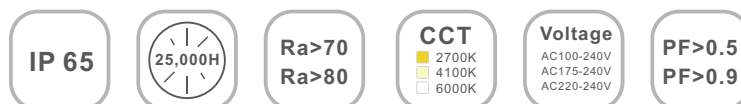

LED FLOOD LIGHT

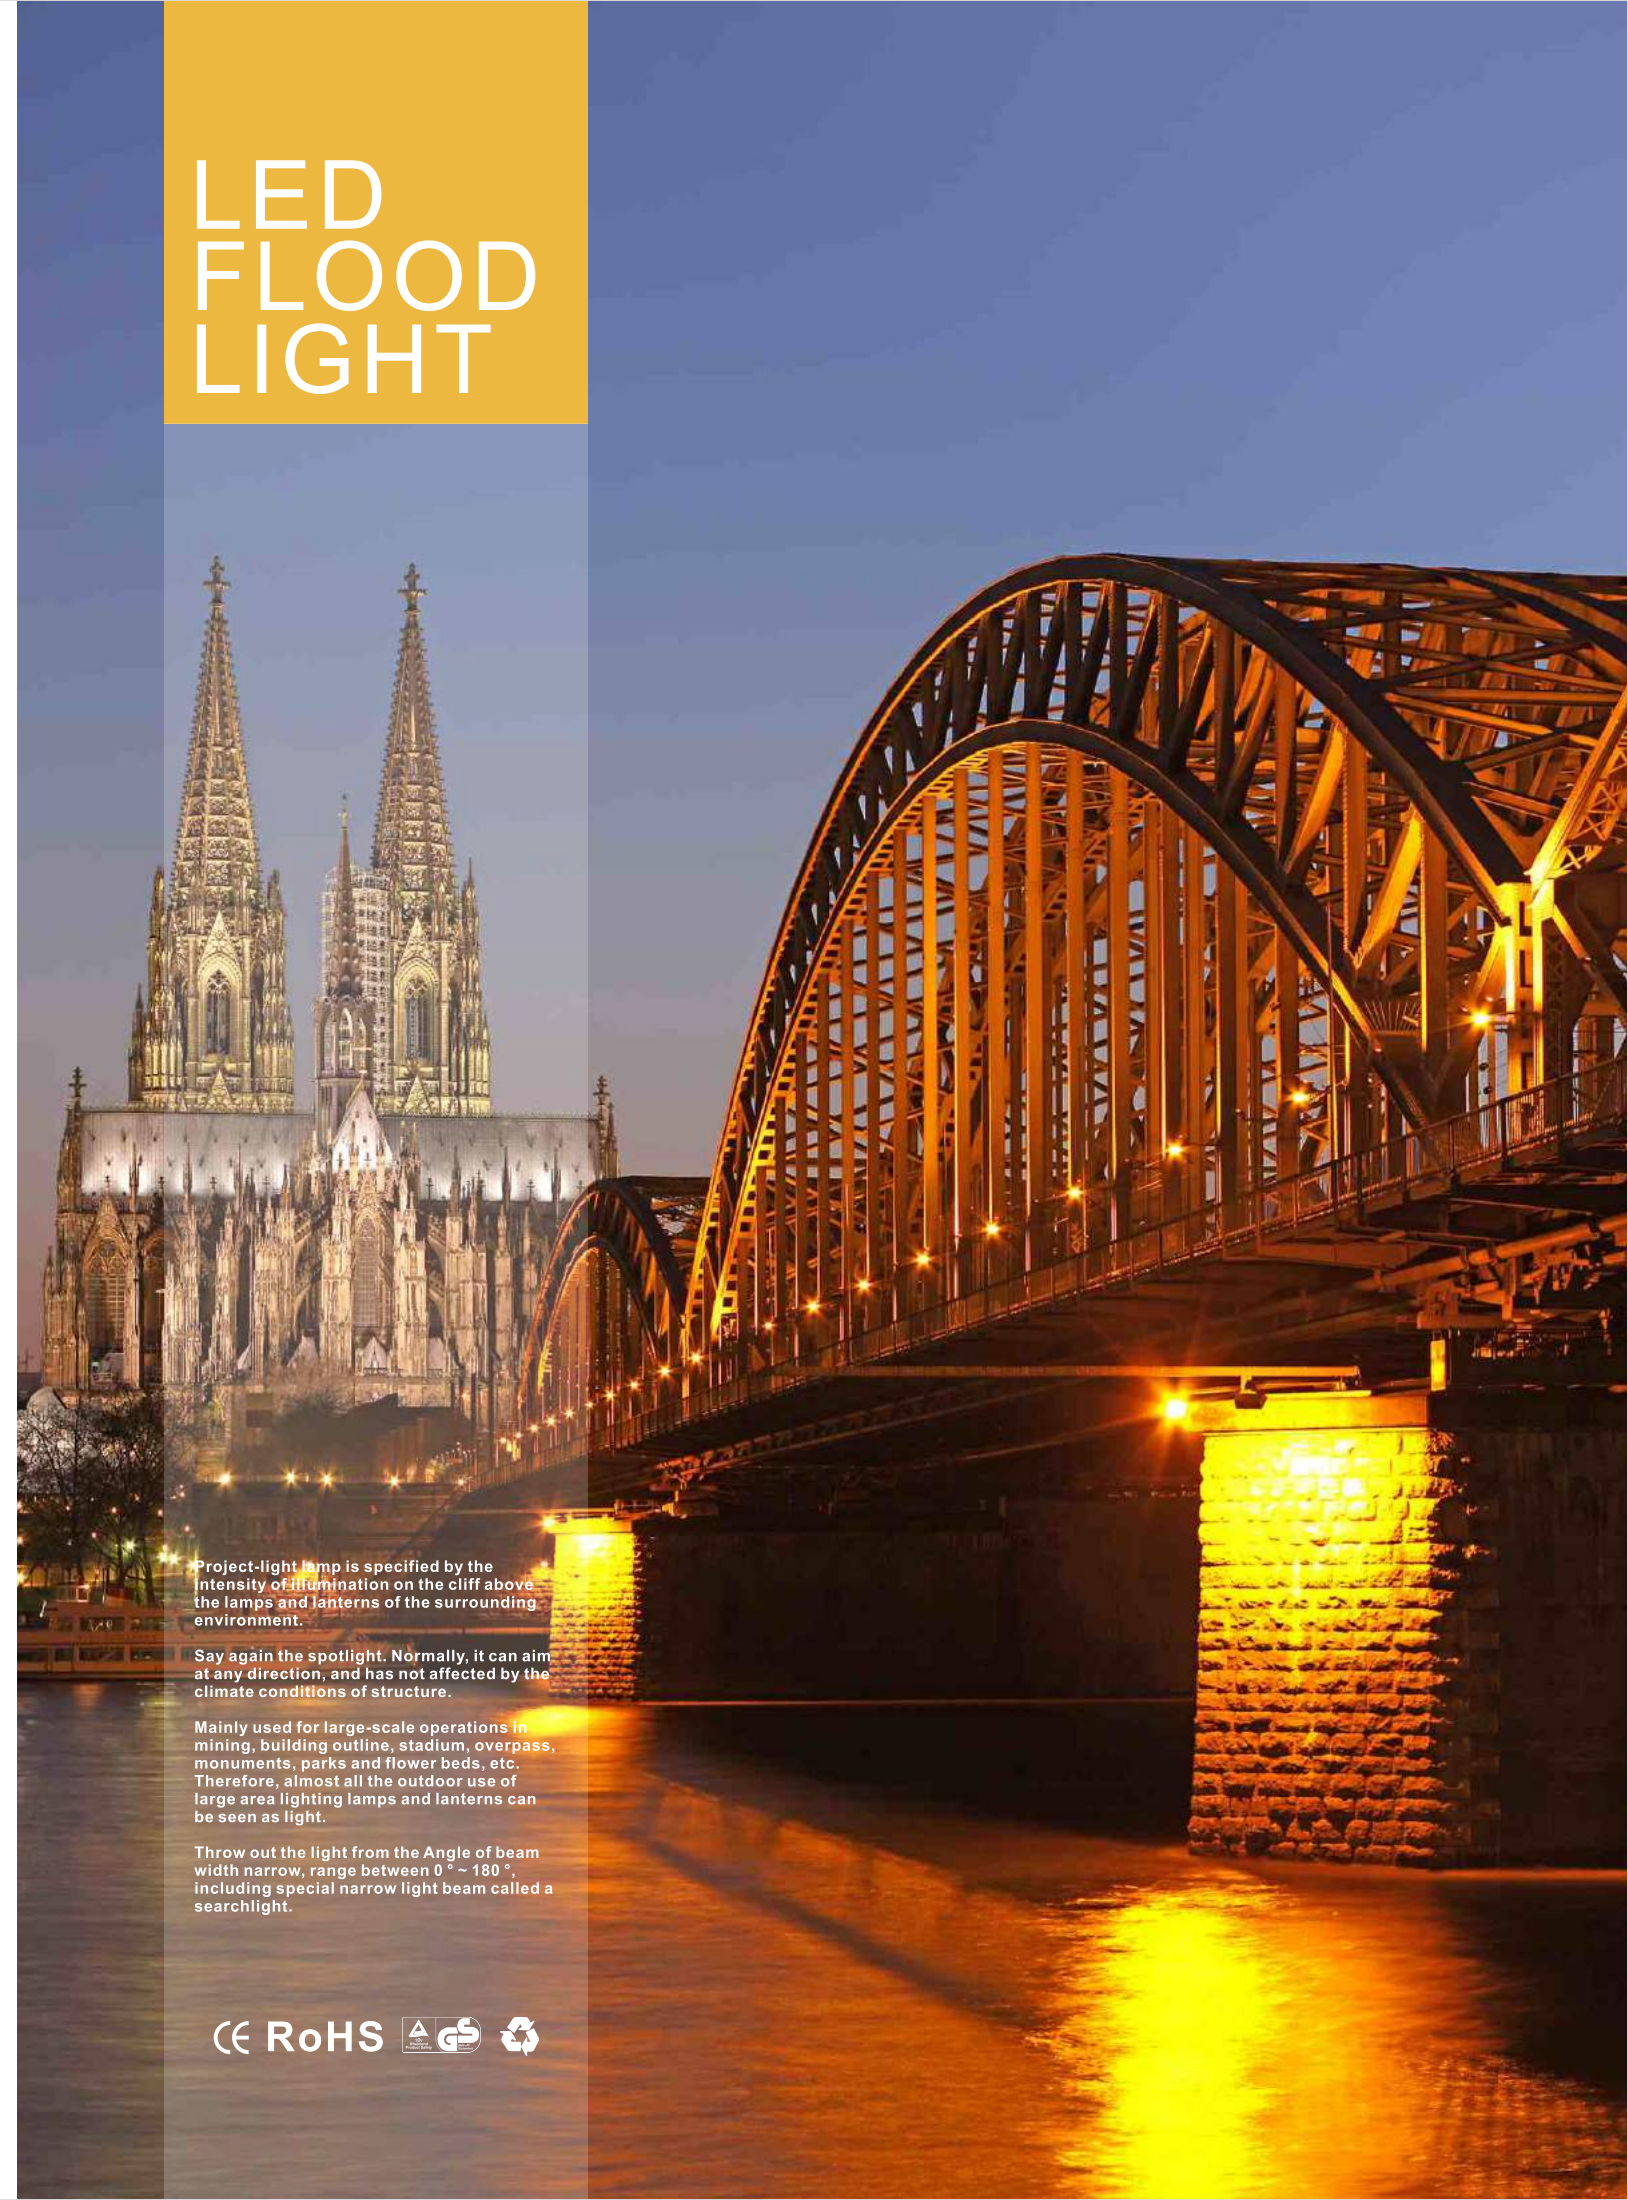

Project-light lamp is specified by the intensity of illumination on the cliff above the lamps and lanterns of the surrounding environment.

Say again the spotlight. Normally, it can aim at any direction, and has not affected by the climate conditions of structure.

Mainly used for large-scale operations in mining, building outline, stadium, overpass, monuments, parks and flower beds, etc. Therefore, almost all the outdoor use of large area lighting lamps and lanterns can be seen as light.

Throw out the light from the Angle of beam width narrow, range between 0° ~ 180°, including special narrow light beam called a searchlight.

CE RoHS






SY6010

IP 65	25,000H	Ra>70 Ra>80	CCT 2700K 4100K 6000K	Voltage AC110-120V AC220-240V	PF>0.5 PF>0.9
-------	---------	----------------	--------------------------------	-------------------------------------	------------------


Watt(W)	10W
Lumen(lm)	800lm
Voltage	AC110/230V
Ra	>80
PF	>0.9
Material	Aluminum
Size(mm)	L95*W76*H20

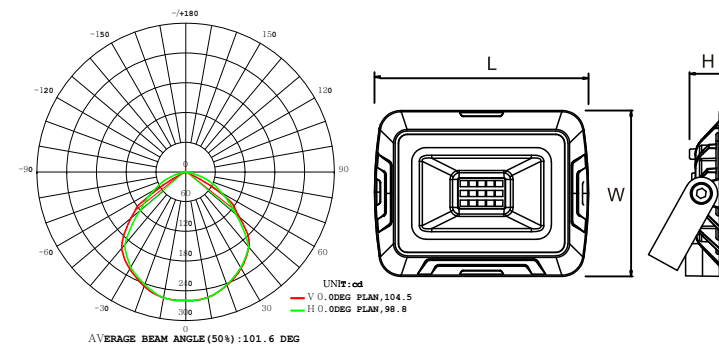

SY6030

IP 65	25,000H	Ra>70 Ra>80	CCT 2700K 4100K 6000K	Voltage AC110-120V AC220-240V	PF>0.5 PF>0.9
-------	---------	----------------	--------------------------------	-------------------------------------	------------------


Watt(W)	30W
Lumen(lm)	2400lm
Voltage	AC110/230V
Ra	>80
PF	>0.9
Material	Aluminum
Size(mm)	L168*W120*H22.5

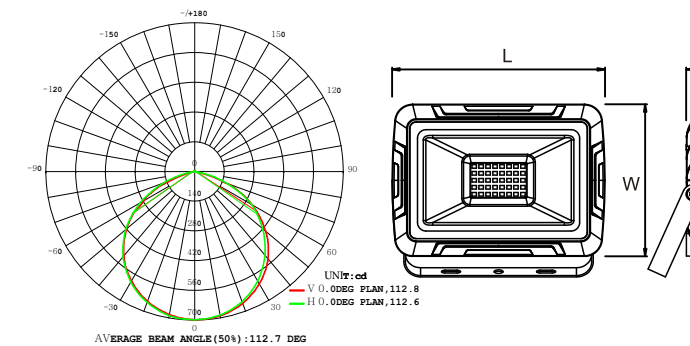

SY6020

IP 65	25,000H	Ra>70 Ra>80	CCT 2700K 4100K 6000K	Voltage AC110-120V AC220-240V	PF>0.5 PF>0.9
-------	---------	----------------	--------------------------------	-------------------------------------	------------------


Watt(W)	20W
Lumen(lm)	1600lm
Voltage	AC110/230V
Ra	>80
PF	>0.9
Material	Aluminum
Size(mm)	L133*W97*H21.5

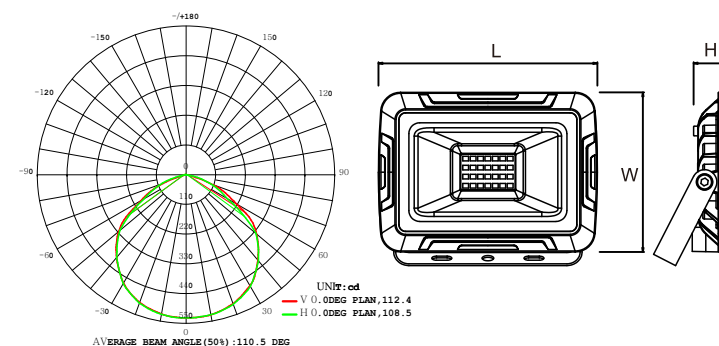

SY6050

IP 65	25,000H	Ra>70 Ra>80	CCT 2700K 4100K 6000K	Voltage AC110-120V AC220-240V	PF>0.5 PF>0.9
-------	---------	----------------	--------------------------------	-------------------------------------	------------------

Watt(W)	50W
Lumen(lm)	4000lm
Voltage	AC110/230V
Ra	>80
PF	>0.9
Material	Aluminum
Size(mm)	L213*W168*H24

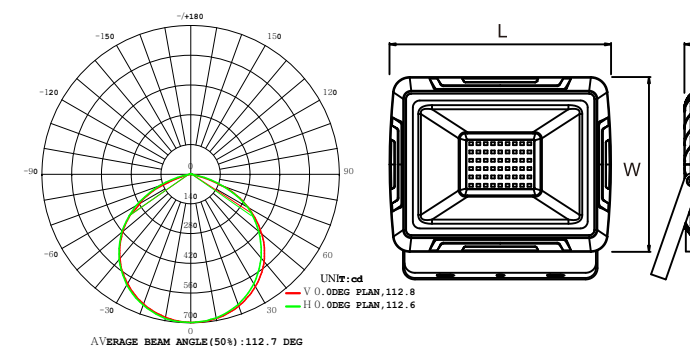




SY6070

IP 65	25,000H	Ra>70 Ra>80	CCT 2700K 4100K 6000K	Voltage AC110-120V AC220-240V	PF>0.5 PF>0.9
-------	---------	----------------	--------------------------------	-------------------------------------	------------------

Watt(W)	70W
Lumen(lm)	5600lm
Voltage	AC110/230V
Ra	>80
PF	>0.9
Material	Aluminum
Size(mm)	L248*W195*H24

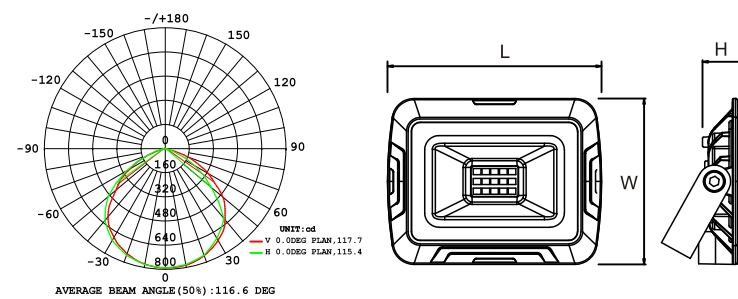

SY6000S LED FLOOD LIGHT

IP 65	25,000H	Ra>70 Ra>80	CCT 2700K 4100K 6000K	Voltage AC100-240V AC175-240V AC220-240V	PF>0.5 PF>0.9
-------	---------	----------------	--------------------------------	---	------------------

Features



- Detective range:120°
- Detective distance:1-12m(Tadius)
- Delay time:2s-5min(adjustable)
- Lux setting:2-50lux



SY6100

IP 65	25,000H	Ra>70 Ra>80	CCT 2700K 4100K 6000K	Voltage AC110-120V AC220-240V	PF>0.5 PF>0.9
-------	---------	----------------	--------------------------------	-------------------------------------	------------------

Watt(W)	100W
Lumen(lm)	7000lm
Voltage	AC110/230V
Ra	>80
PF	>0.9
Material	Aluminum
Size(mm)	L282*W222*H25

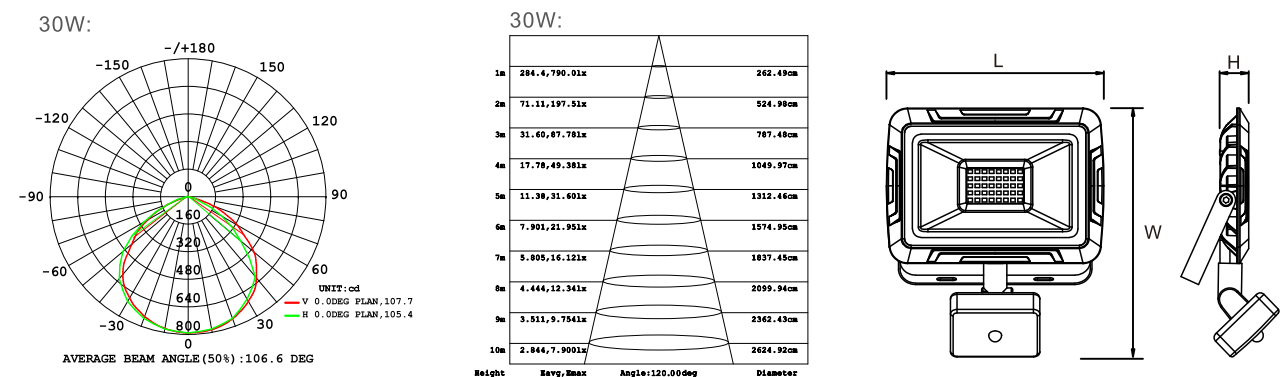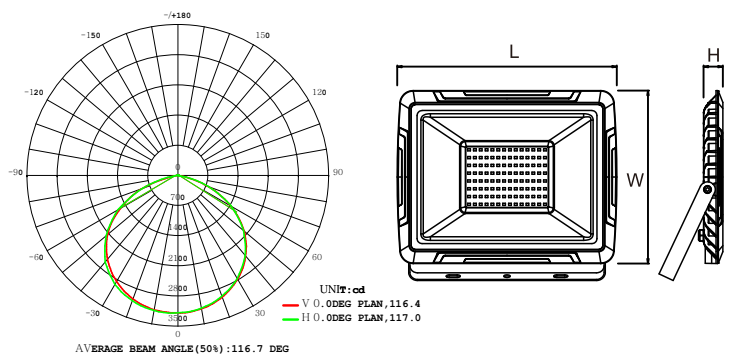

Item No.	W	lm	V	Ra	PF	Material	Size(mm)
SY-6010S	10W	800lm	AC110/230V	>80	>0.9	Aluminum	L98*W148*H20
SY-6020S	20W	1600lm	AC110/230V	>80	>0.9	Aluminum	L133*W169*H21.5
SY-6030S	30W	2400lm	AC110/230V	>80	>0.9	Aluminum	L168*W192*H22.5
SY-6050S	50W	4000lm	AC110/230V	>80	>0.9	Aluminum	L213*W240*H24
SY-6070S	70W	5600lm	AC110/230V	>80	>0.9	Aluminum	L248*W267*H24
SY-6100S	100W	7000lm	AC110/230V	>80	>0.9	Aluminum	L282*W294*H25


220-240V
100-240V



SY5010

IP 65	25,000H	Ra>70 Ra>80	CCT 2700K 4100K 6000K	Voltage AC100-240V AC220-240V	PF>0.5 PF>0.9
-------	---------	----------------	--------------------------------	-------------------------------------	------------------


Watt(W)	10W
Lumen(lm)	800lm
Voltage	AC100-240V
Ra	>80
PF	>0.9
Material	Aluminum
Size(mm)	L70*W90*H23

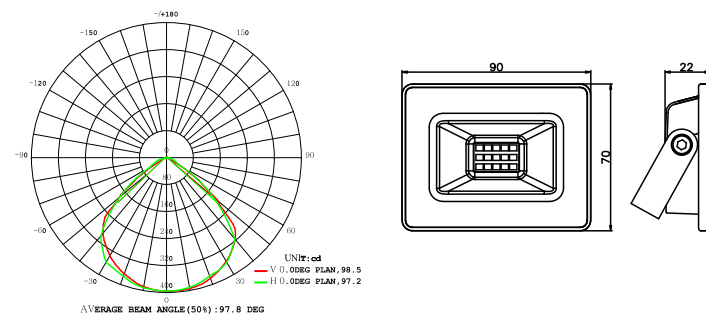

SY5030

IP 65	25,000H	Ra>70 Ra>80	CCT 2700K 4100K 6000K	Voltage AC100-240V AC220-240V	PF>0.5 PF>0.9
-------	---------	----------------	--------------------------------	-------------------------------------	------------------

Watt(W)	30W
Lumen(lm)	2400lm
Voltage	AC100-240V
Ra	>80
PF	>0.9
Material	Aluminum
Size(mm)	L110.5*W159.5*H31

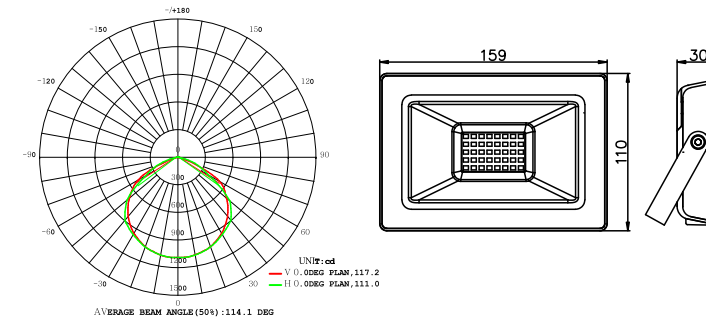

220-240V
100-240V




220-240V
100-240V



SY5020

IP 65	25,000H	Ra>70 Ra>80	CCT 2700K 4100K 6000K	Voltage AC100-240V AC220-240V	PF>0.5 PF>0.9
-------	---------	----------------	--------------------------------	-------------------------------------	------------------


Watt(W)	20W
Lumen(lm)	1600lm
Voltage	AC100-240V
Ra	>80
PF	>0.9
Material	Aluminum
Size(mm)	L88*W125*H25

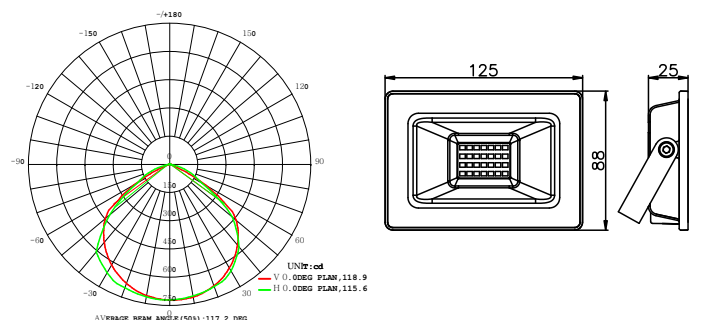

SY5050

IP 65	25,000H	Ra>70 Ra>80	CCT 2700K 4100K 6000K	Voltage AC100-240V AC220-240V	PF>0.5 PF>0.9
-------	---------	----------------	--------------------------------	-------------------------------------	------------------

Watt(W)	50W
Lumen(lm)	4000lm
Voltage	AC100-240V
Ra	>80
PF	>0.9
Material	Aluminum
Size(mm)	L161*W206.5*H31

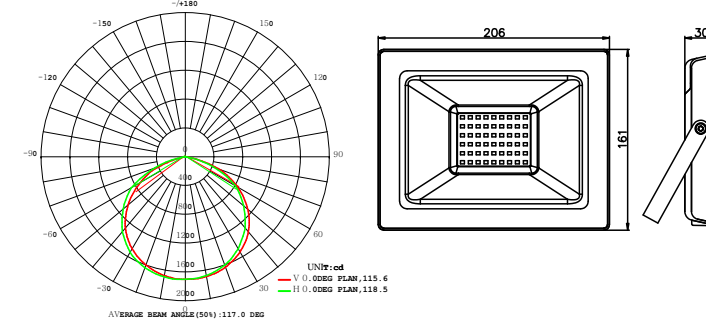

220-240V
100-240V




220-240V
100-240V



SY5100

IP 65	25,000H	Ra>70 Ra>80	CCT 2700K 4100K 6000K	Voltage AC100-240V AC220-240V	PF>0.5 PF>0.9
-------	---------	----------------	--------------------------------	-------------------------------------	------------------

Watt(W)	10W
Lumen(lm)	800lm
Voltage	AC100-240V
Ra	>80
PF	>0.9
Material	Aluminum
Size(mm)	L70*W90*H23


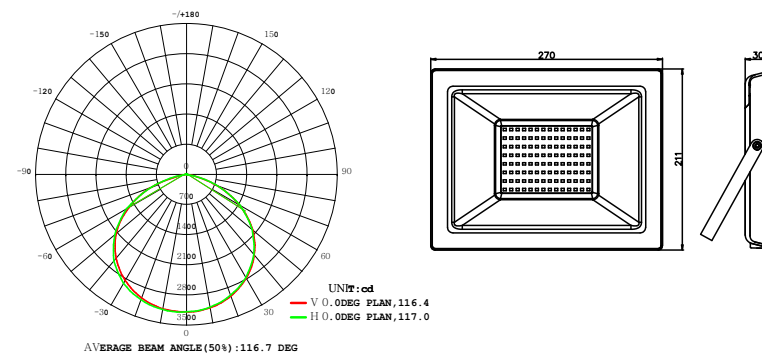


SY5000S LED FLOOD LIGHT

IP 65	25,000H	Ra>70 Ra>80	CCT 2700K 4100K 6000K	Voltage AC100-240V AC175-240V AC220-240V	PF>0.5 PF>0.9
-------	---------	----------------	--------------------------------	---	------------------

Features

- Detective range:120°
- Detective distance:1-12m(Tadius)
- Delay time:2s-5min(adjustable)
- Lux setting:2-50lux

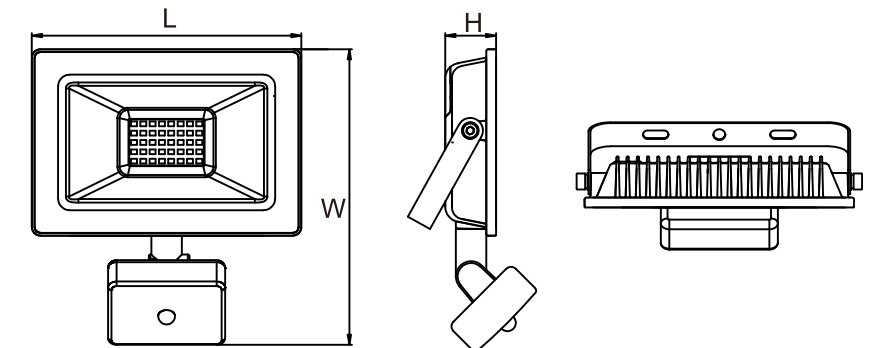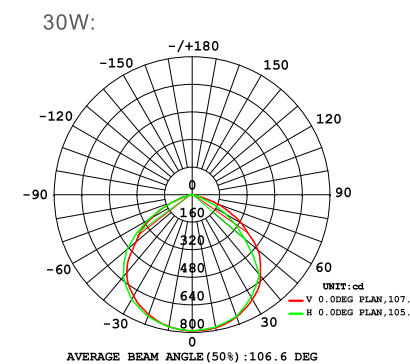

Item No.	W	lm	V	Ra	PF	Material	Size(mm)
SY-5010S	10W	800lm	AC110/230V	>80	>0.5	Aluminum	L90*W145*H22
SY-5020S	20W	1600lm	AC110/230V	>80	>0.5	Aluminum	L125*W163*H25
SY-5030S	30W	2400lm	AC110/230V	>80	>0.9	Aluminum	L159*W185*H30
SY-5050S	50W	4000lm	AC110/230V	>80	>0.9	Aluminum	L206*W236*H30
SY-5100S	100W	7000lm	AC110/230V	>80	>0.9	Aluminum	L270*W286*H30


3YEARS
warranty



SY8010

IP 65	25,000H	Ra>70 Ra>80	CCT 2700K 4100K 6000K	Voltage AC100-240V AC175-240V AC220-240V	PF>0.5 PF>0.9
-------	---------	----------------	--------------------------------	---	------------------


Watt(W)	10W
Lumen(lm)	800lm
Voltage	AC220-240
Ra	>80
PF	>0.5
Material	Aluminum
Size(mm)	L133*W120*H30

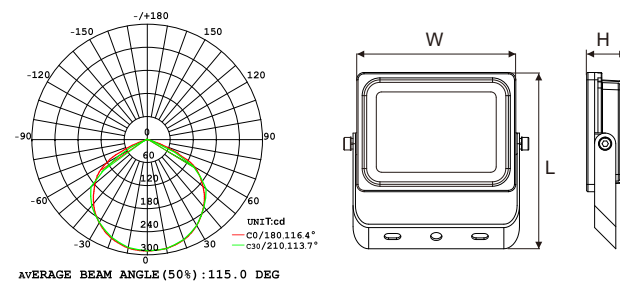


SY8030

IP 65	25,000H	Ra>70 Ra>80	CCT 2700K 4100K 6000K	Voltage AC100-240V AC175-240V AC220-240V	PF>0.5 PF>0.9
-------	---------	----------------	--------------------------------	---	------------------

Watt(W)	30W
Lumen(lm)	2400lm
Voltage	AC220-240
Ra	>80
PF	>0.9
Material	Aluminum
Size(mm)	L191.5*W190*H30

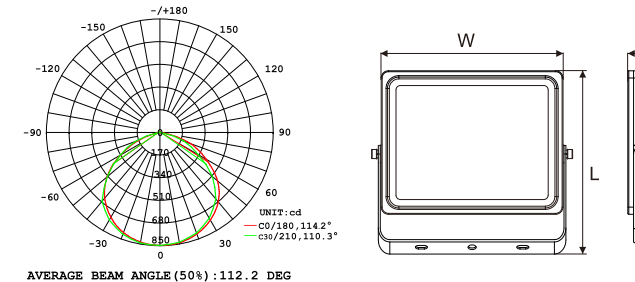


3YEARS
warranty

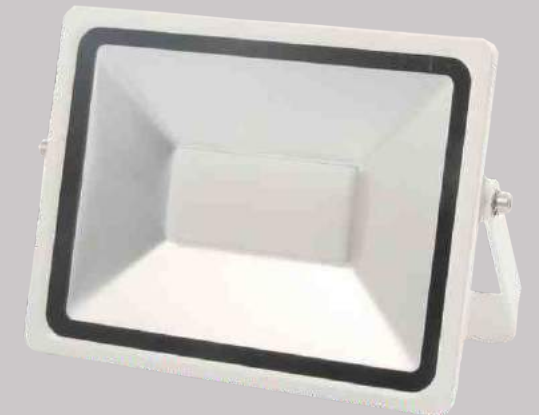

SY8020

IP 65	25,000H	Ra>70 Ra>80	CCT 2700K 4100K 6000K	Voltage AC100-240V AC175-240V AC220-240V	PF>0.5 PF>0.9
-------	---------	----------------	--------------------------------	---	------------------


Watt(W)	20W
Lumen(lm)	1600lm
Voltage	AC220-240
Ra	>80
PF	>0.5
Material	Aluminum
Size(mm)	L159*W160*H30

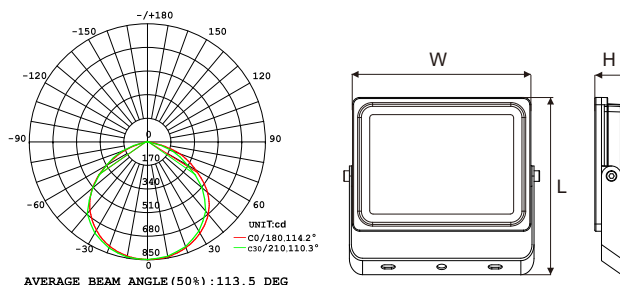

SY8050

IP 65	25,000H	Ra>70 Ra>80	CCT 2700K 4100K 6000K	Voltage AC100-240V AC175-240V AC220-240V	PF>0.5 PF>0.9
-------	---------	----------------	--------------------------------	---	------------------

Watt(W)	50W
Lumen(lm)	4000lm
Voltage	AC220-240
Ra	>80
PF	>0.9
Material	Aluminum
Size(mm)	L228*W255*H31

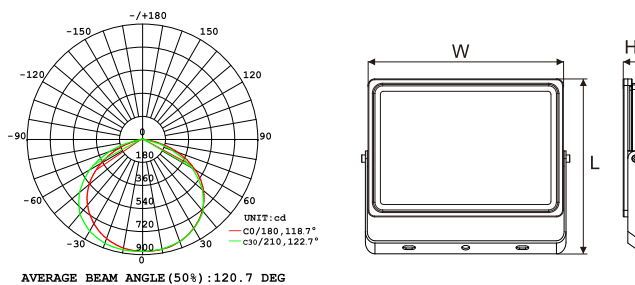

3YEARS
warranty



3YEARS
warranty






SY8000S LED FLOOD LIGHT

IP 65	25,000H	Ra>70 Ra>80
CCT 2700K 4100K 6000K	Voltage AC100-240V AC175-240V AC220-240V	PF>0.5 PF>0.9

Features

- Detective range:120°
- Detective distance:1-12m(Tadius)
- Delay time:2s-5min(adjustable)
- Lux setting:2-50lux

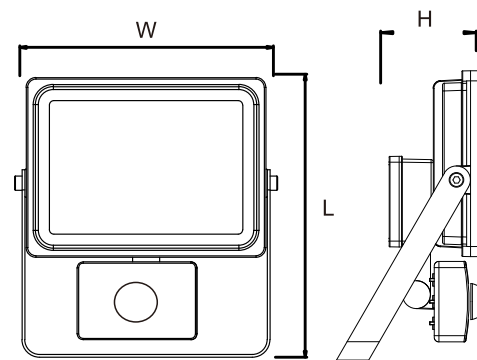

Item No.	W	Im	V	Ra	PF	Material	Size(mm)
SY-8010S	10W	800lm	AC170-250V	>80	>0.5	Aluminum	L133*W120*H30
SY-8020S	20W	1600lm	AC170-250V	>80	>0.5	Aluminum	L159*W160*H30
SY-8030S	30W	2400lm	AC170-250V	>80	>0.9	Aluminum	L191.5*W190*H30
SY-8050S	50W	4000lm	AC170-250V	>80	>0.9	Aluminum	L228*W255*H31



Features

- COB reflector
- Clear glass
- Without SMD cover
- Without wire box



Features

- PC reflector
- Clear glass
- Without SMD cover
- Without wire box



Features

- Aluminum reflector
- Clear glass
- With SMD cover
- Without wire box



Features

- PC reflector
- Clear glass
- With SMD cover
- With wire box

Colors:

White
Gray
Black





SY8000R
LED FLOOD LIGHT

IP 65

25,000H

Ra>70
Ra>80


CCT
2700K
4100K
6000K

Voltage
AC100-240V
AC175-240V
AC220-240V

PF>0.5
PF>0.9

Features

- Control Mode:App
- Control:BLUETOOTH 4.0
- Working temperature: -5 to 50 °C
- CCT: 3000K-6500K

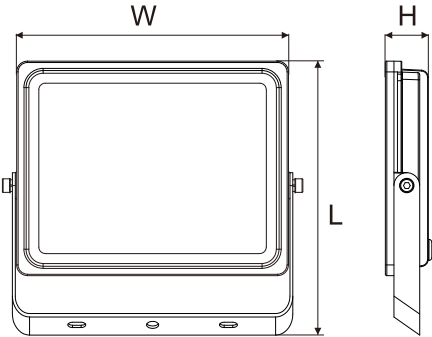

Item No.	W	Im	V	Ra	PF	Material	Size(mm)
SYFLBT-01	10W	500lm	AC170-250V	>80	>0.5	Aluminum	L133*W120*H30
SYFLBT-02	30W	1500lm	AC170-250V	>80	>0.9	Aluminum	L192*W190*H30
SYFLBT-03	50W	2500lm	AC170-250V	>80	>0.9	Aluminum	L220*W255*H31


LED FLOOD LIGHT

Project-light lamp is specified by the intensity of illumination on the cliff above the lamps and lanterns of the surrounding environment.

Say again the spotlight. Normally, it can aim at any direction, and has not affected by the climate conditions of structure.

Mainly used for large-scale operations in mining, building outline, stadium, overpass, monuments, parks and flower beds, etc. Therefore, almost all the outdoor use of large area lighting lamps and lanterns can be seen as light.

Throw out the light from the Angle of beam width narrow, range between 0° ~ 180°, including special narrow light beam called a searchlight.



5YEARS warranty



SY9000
LED FLOOD LIGHT



IP 65


25,000H

Ra>70
Ra>80

CCT
2700K
4100K
6000K

Voltage
AC100-240V
AC175-240V
AC220-240V

PF>0.5
PF>0.9

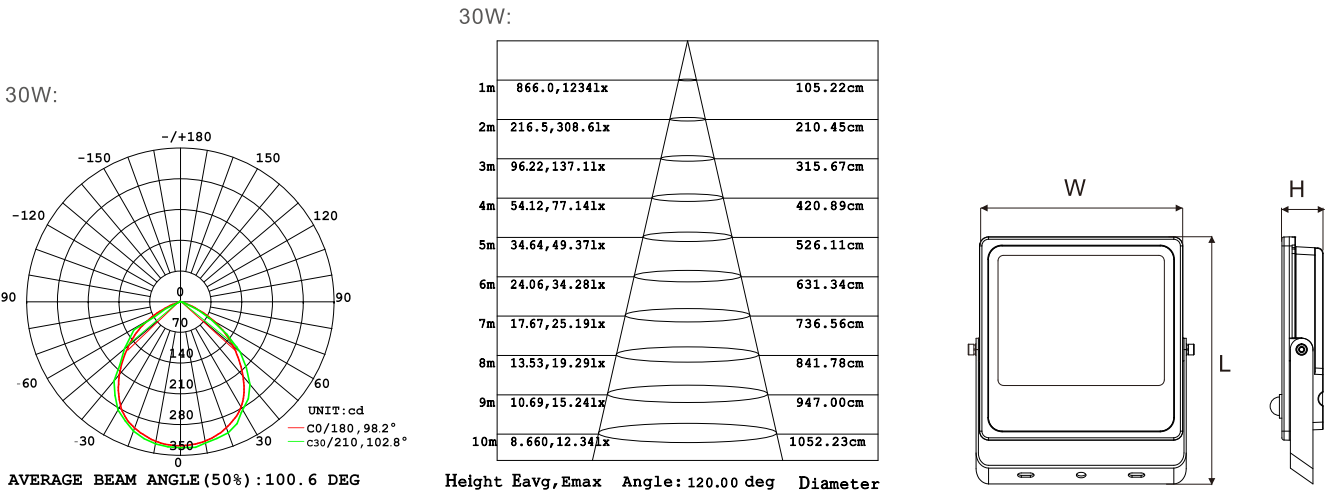

Item No.	W	lm	V	Ra	PF	Material	Size(mm)
SY-9020	20W	1600lm	AC170-250V	>80	>0.5	Aluminum	L192.5*W170*H47
SY-9030	30W	2400lm	AC170-250V	>80	>0.9	Aluminum	L218.5*W195*H47
SY-9050	50W	4000lm	AC170-250V	>80	>0.9	Aluminum	L263.5*W235*H49
SY-9070	70W	5250lm	AC170-250V	>80	>0.9	Aluminum	L263.5*W235*H49

5YEARS
warranty





SY9000S

LED FLOOD LIGHT

IP 65	25,000H	Ra>70 Ra>80
CCT 2700K 4100K 6000K	Voltage AC100-240V AC175-240V AC220-240V	PF>0.5 PF>0.9

Features

- Detective range:120°
- Detective distance:12m
- Delay time:5min

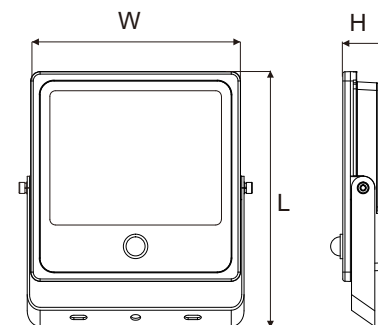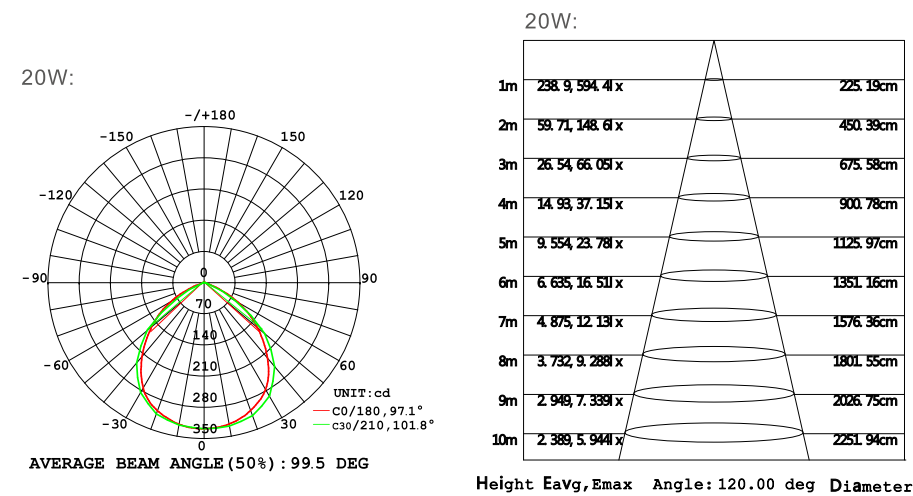

Item No.	W	Im	V	Ra	PF	Material	Size(mm)
SY-9020S	20W	1600lm	AC170-250V	>80	>0.5	Aluminum	L192.5*W170*H47
SY-9030S	30W	2400lm	AC170-250V	>80	>0.9	Aluminum	L218.5*W195*H47
SY-9050S	50W	4000lm	AC170-250V	>80	>0.9	Aluminum	L263.5*W235*H49
SY-9070S	70W	5250lm	AC170-250V	>80	>0.9	Aluminum	L263.5*W235*H49

5YEARS
warranty





SY9000M

LED FLOOD LIGHT

IP 65	25,000H	Ra>70 Ra>80
CCT 2700K 4100K 6000K	Voltage AC100-240V AC175-240V AC220-240V	PF>0.5 PF>0.9

Features

- Detective range:360°
- Detective distance:12m
- Delay time:5min

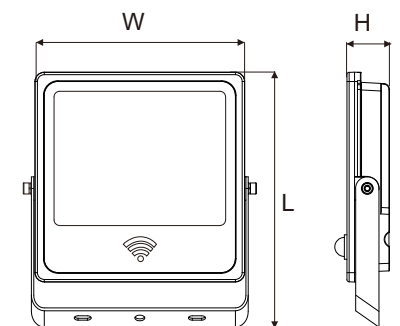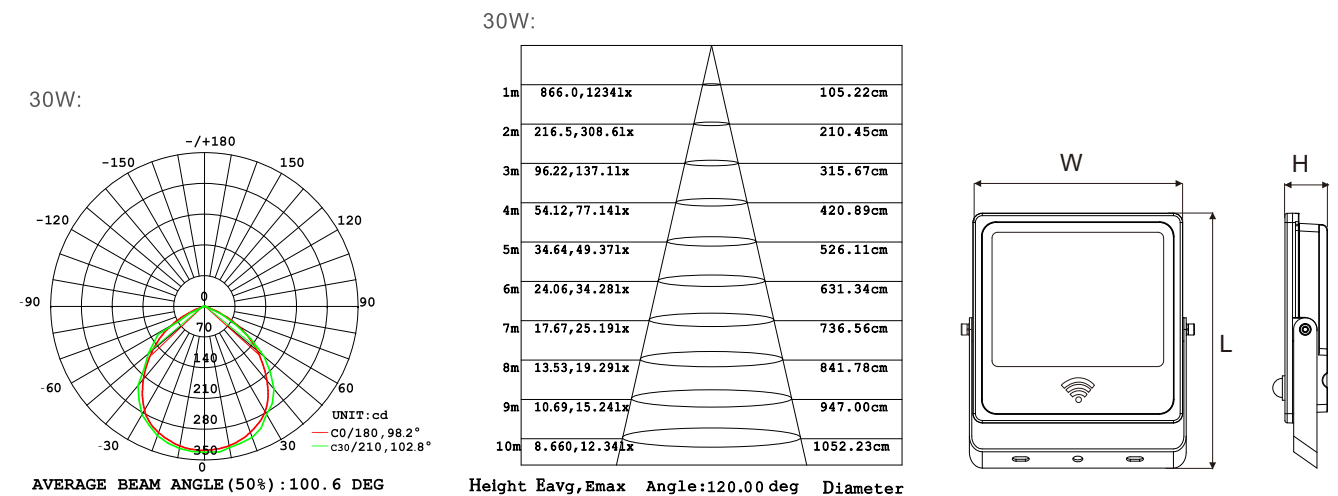

Item No.	W	Im	V	Ra	PF	Material	Size(mm)
SY-9020M	20W	1600lm	AC170-250V	>80	>0.5	Aluminum	L192.5*W170*H47
SY-9030M	30W	2400lm	AC170-250V	>80	>0.9	Aluminum	L218.5*W195*H47
SY-9050M	50W	4000lm	AC170-250V	>80	>0.9	Aluminum	L263.5*W235*H49
SY-9070M	70W	5250lm	AC170-250V	>80	>0.9	Aluminum	L263.5*W235*H49



SY1000
LED FLOOD LIGHT

IP 65

25,000H

Ra>70
Ra>80



CCT
2700K
4100K
6000K

Voltage
AC100-240V
AC175-240V
AC220-240V

PF>0.5
PF>0.9

Features

- Screw: front or back
- Light source: SMD or COB
- Driver: IC driver or Linear IC driver

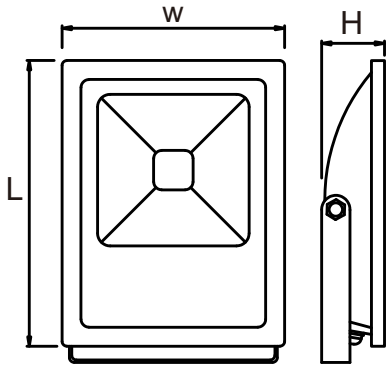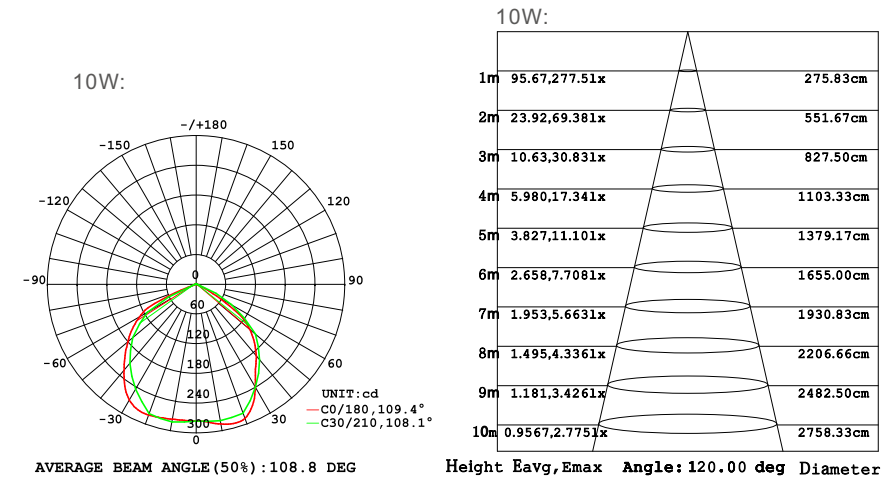

Item No.	W	Im	V	Ra	PF	Material	Size(mm)
SY-1010	10W	800lm	AC175-265V	>80	>0.5	Aluminum	L114*W85*H36
SY-1020	20W	1600lm	AC175-265V	>80	>0.5	Aluminum	L180*W140*H46
SY-1030	30W	2400lm	AC175-265V	>80	>0.9	Aluminum	L230*W190*H60
SY-1050	50W	4000lm	AC175-265V	>80	>0.9	Aluminum	L285*W240*H65
SY-1070	70W	5600lm	AC175-265V	>80	>0.9	Aluminum	L285*W240*H65
SY-1100	100W	7000lm	AC175-265V	>80	>0.9	Aluminum	L373*W300*H86



SY1000
LED FLOOD LIGHT

IP 65



25,000H

Ra>70
Ra>80

CCT
2700K
4100K
6000K

Voltage
AC100-240V
AC175-240V
AC220-240V

PF>0.5
PF>0.9

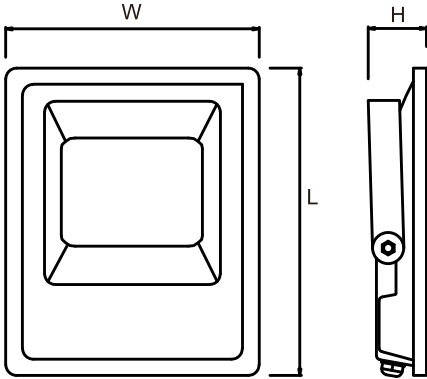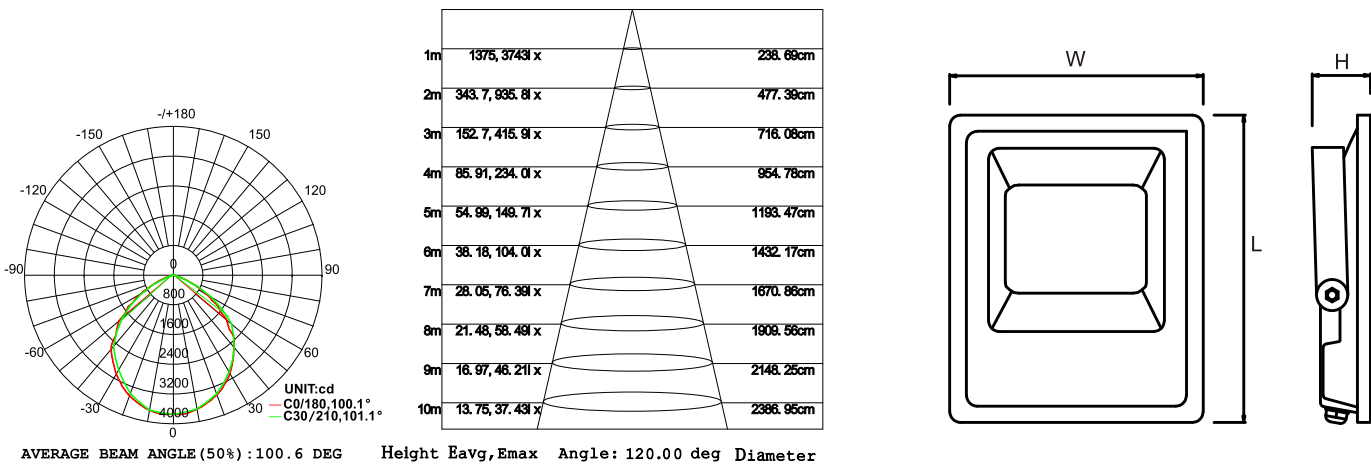


Item No.	W	Im	V	Ra	PF	Material	Size(mm)
SY-1150	150W	9000lm	AC175-265V	>80	>0.5	Aluminum	L425*W315*H100
SY-1200	200W	12000lm	AC175-265V	>80	>0.9	Aluminum	L425*W315*H100
SY-1300	300W	18000lm	AC175-265V	>80	>0.9	Aluminum	L530*W345*H100
SY-1400	400W	24000lm	AC175-265V	>80	>0.9	Aluminum	L630*W345*H100
SY-1500	500W	30000lm	AC175-265V	>80	>0.9	Aluminum	L830*W350*H100
SY-1600	600W	36000lm	AC175-265V	>80	>0.9	Aluminum	L950*W350*H100
SY-1800	800W	48000lm	AC175-265V	>80	>0.9	Aluminum	L950*W350*H100





SY1000S

LED FLOOD LIGHT

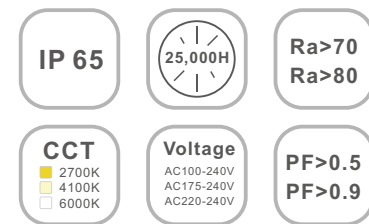

Features

- Detective range:180°
- Detective distance:1-12m(Tadius)
- Delay time:2s-5min(adjustable)
- Lux setting:2-50lux

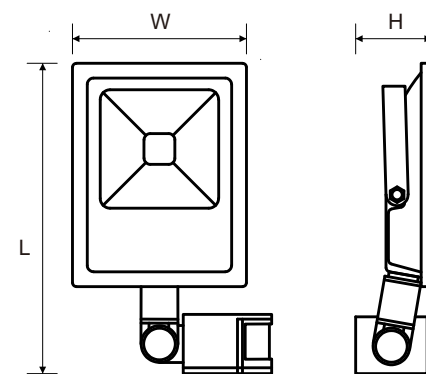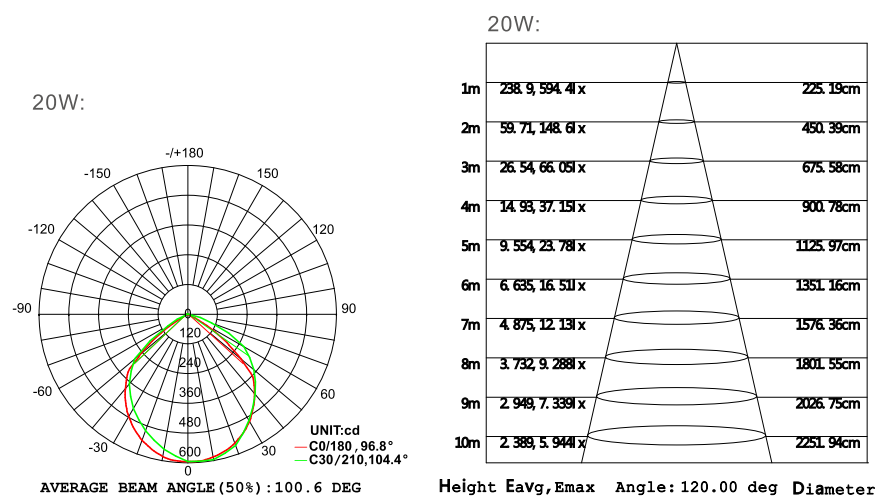


Item No.	W	Im	V	Ra	PF	Material	Size(mm)
SY-1010S	10W	800lm	AC175-265V	>80	>0.5	Aluminum	L114*W85*H36
SY-1020S	20W	1600lm	AC175-265V	>80	>0.5	Aluminum	L180*W140*H46
SY-1030S	30W	2400lm	AC175-265V	>80	>0.9	Aluminum	L230*W190*H60
SY-1050S	50W	4000lm	AC175-265V	>80	>0.9	Aluminum	L285*W240*H65





SY1000M

LED FLOOD LIGHT

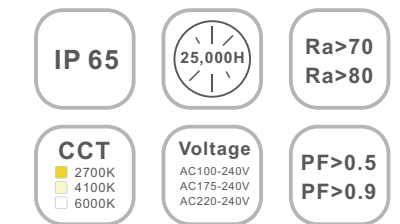

Features

- Detective range:120°
- Detective distance:12m
- Delay time:5min
- Lux setting:50lux

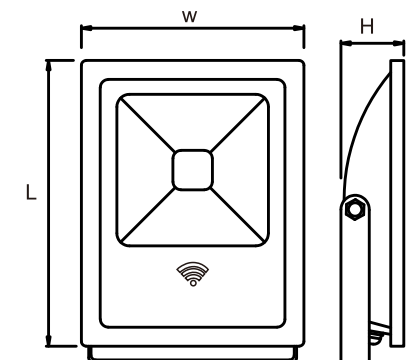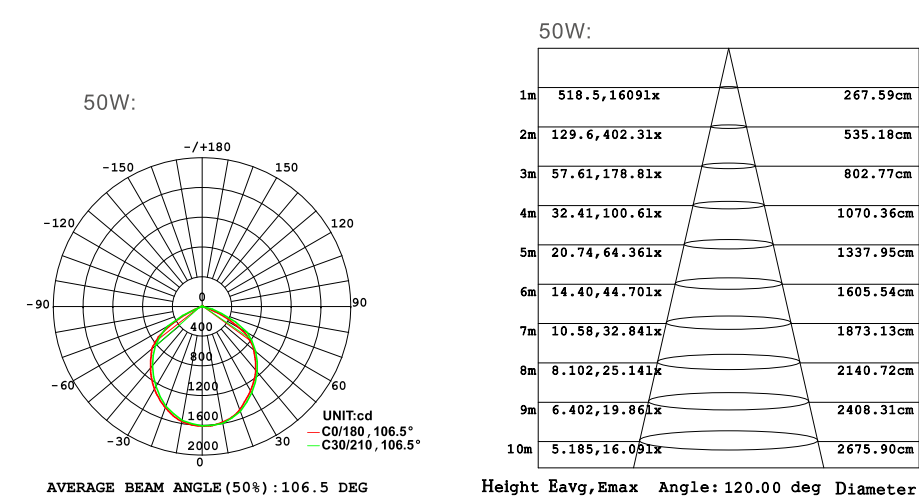

Item No.	W	Im	V	Ra	PF	Material	Size(mm)
SY-1010M	10W	800lm	AC175-265V	>80	>0.5	Aluminum	L200*W142*H67
SY-1020M	20W	1600lm	AC175-265V	>80	>0.5	Aluminum	L257*W156*H73
SY-1030M	30W	2400lm	AC175-265V	>80	>0.9	Aluminum	L297*W186*H70
SY-1050M	50W	4000lm	AC175-265V	>80	>0.9	Aluminum	L360*W235*H70

LED FLOOD LIGHT






SY1000L LED FLOOD LIGHT

IP 65	25,000H	Ra>70 Ra>80
CCT 2700K 4100K 6000K	Voltage AC100-240V AC175-240V AC220-240V	PF>0.5 PF>0.9

Features

- Detective range:120°
- Detective distance:12m
- Delay time:5min
- Solar power

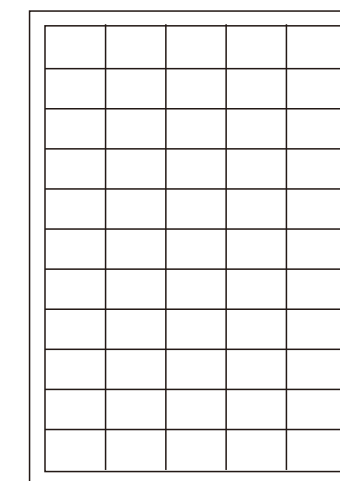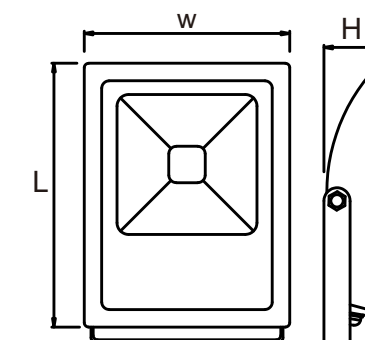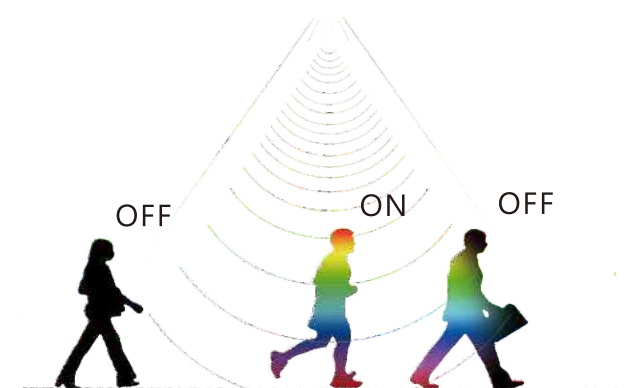

Project-light lamp is specified by the intensity of illumination on the cliff above the lamps and lanterns of the surrounding environment.

Say again the spotlight. Normally, it can aim at any direction, and has not affected by the climate conditions of structure.

Mainly used for large-scale operations in mining, building outline, stadium, overpass, monuments, parks and flower beds, etc. Therefore, almost all the outdoor use of large area lighting lamps and lanterns can be seen as light.


Throw out the light from the Angle of beam width narrow, range between 0° ~ 180°, including special narrow light beam called a searchlight.

Item No.	W	Im	Ra	Material	Floodlight Size(mm)	Solar Size(mm)
SY-1008L	8W	1000lm	>80	Aluminum	L173*137*H43	320*205
SY-1010L	10W	1500lm	>80	Aluminum	L223*183*H47	350*350
SY-1015L	15W	2000lm	>80	Aluminum	L283*233*H57	530*350



SY7000 LED FLOOD LIGHT

IP 65	25,000H	Ra>70 Ra>80
CCT 2700K 4100K 6000K	Voltage AC100-240V AC175-240V AC220-240V	PF>0.5 PF>0.9

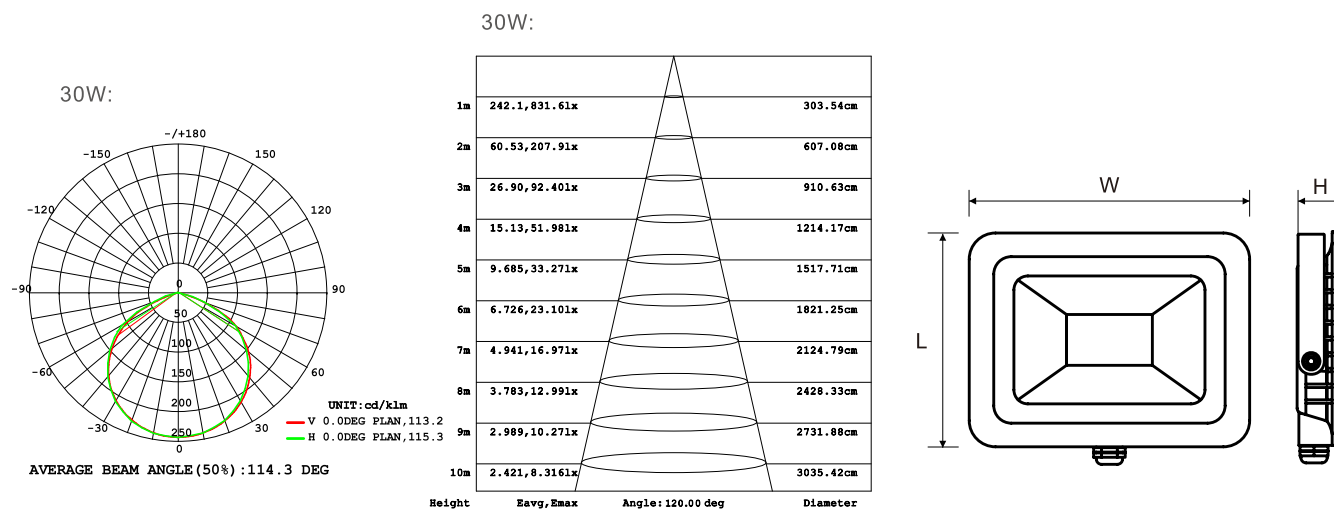

Item No.	W	lm	V	Ra	PF	Material	Size(mm)
SY-7010	10W	800lm	AC110/230V	>80	>0.9	Aluminum	L83*W103*H24
SY-7020	20W	1600lm	AC110/230V	>80	>0.9	Aluminum	L95*W121*H23
SY-7030	30W	2400lm	AC110/230V	>80	>0.9	Aluminum	L122*W160*H26
SY-7050	50W	4000lm	AC110/230V	>80	>0.9	Aluminum	L160*W206*H33
SY-7100	100W	7000lm	AC110/230V	>80	>0.9	Aluminum	L210*W270*H33
SY-7200	200W	14000lm	AC110/230V	>80	>0.9	Aluminum	L280*W380*H36
SY-7300	300W	21000lm	AC110/230V	>80	>0.9	Aluminum	L335*W445*H36




White



Black

SY2000 LED FLOOD LIGHT

IP 65	25,000H	Ra>70 Ra>80
CCT 2700K 4100K 6000K	Voltage AC100-240V AC175-240V AC220-240V	PF>0.5 PF>0.9

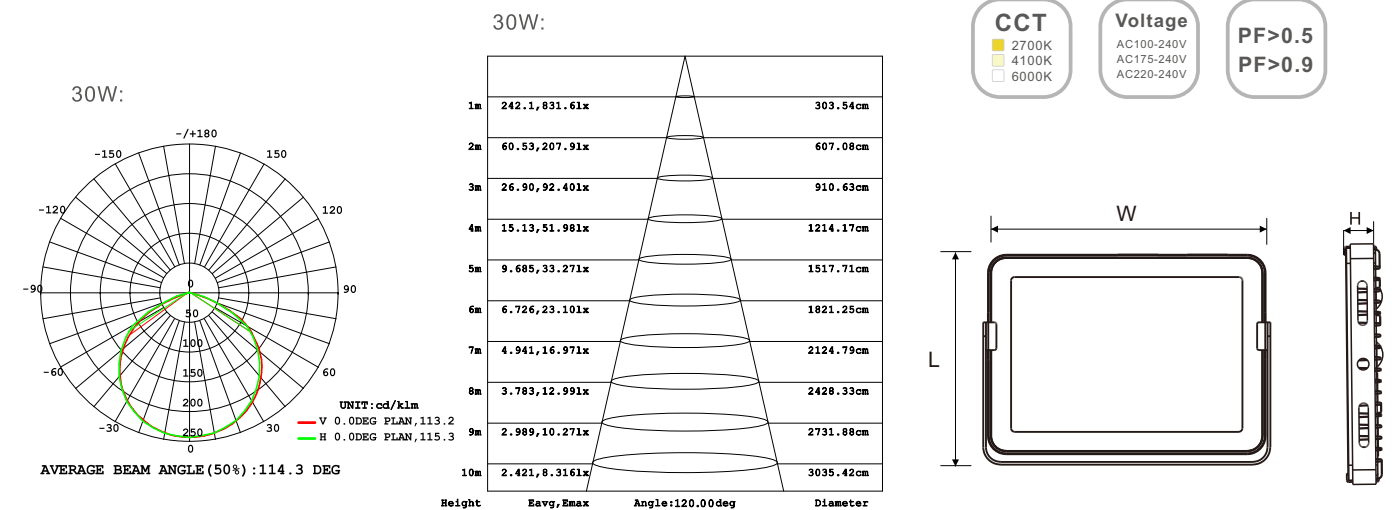

Item No.	W	lm	V	Ra	PF	Material	Size(mm)
SY-7010	10W	800lm	AC110/230V	>80	>0.9	Graphene	L76*W98*H20
SY-7020	20W	1600lm	AC110/230V	>80	>0.9	Graphene	L97*W133*H21.5
SY-7030	30W	2400lm	AC110/230V	>80	>0.9	Graphene	L120*W168*H22.5
SY-7050	50W	4000lm	AC110/230V	>80	>0.9	Graphene	L168*W213*H24
SY-7100	100W	7000lm	AC110/230V	>80	>0.9	Graphene	L222*W282*H25



SY3000
LED FLOOD LIGHT

IP 65

25,000H



Ra>70
Ra>80

CCT
2700K
4100K
6000K

Voltage
AC100-240V
AC175-240V
AC220-240V

PF>0.5
PF>0.9

ErP RoHS SAA BSCI

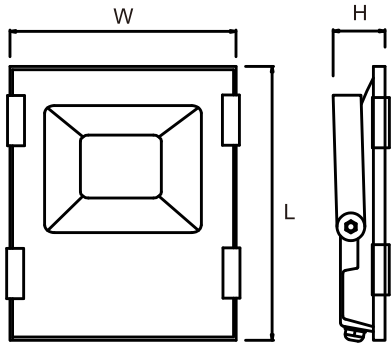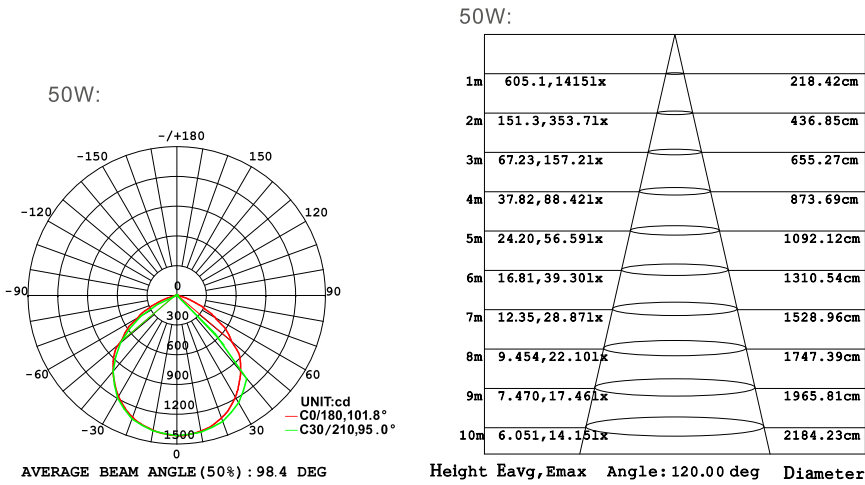

Item No.	W	lm	V	Ra	PF	Material	Size(mm)
SY-3010	10W	800lm	AC175-265V	>80	>0.5	Aluminum	L100*W130*H33
SY-3020	20W	1600lm	AC175-265V	>80	>0.5	Aluminum	L135*W175*H43
SY-3030	30W	2400lm	AC175-265V	>80	>0.9	Aluminum	L180*W220*H46
SY-3050	50W	4000lm	AC175-265V	>80	>0.9	Aluminum	L282*W250*H57
SY-3100	100W	7000lm	AC175-265V	>80	>0.9	Aluminum	L295*W350*H63
SY-3150	150W	10500lm	AC175-265V	>80	>0.9	Aluminum	L400*W320*H76
SY-3200	200W	14000lm	AC175-265V	>80	>0.9	Aluminum	L400*W320*H76
SY-3300	300W	21000lm	AC175-265V	>80	>0.9	Aluminum	L450*W405*H80
SY-3400	400W	28000lm	AC175-265V	>80	>0.9	Aluminum	L450*W405*H80



01



02



03



04



05



06



07



08



09



10

