

[illegible]

 www.sylight.net



Technischer Überwachungs-Verein Certificate



INTRODUCTION

SIYINGLED is located in Yuyao,Ningbo, specialized in producing led light source and led lighting. Factory has more than 500 employees and area more than 20,000 square meters.


The company has passed international standard product authentications in safety assurance including ISO9001, CE,RoHS,GS,SAA ,ErP and TUV certification.

Being an OEM/ODM manufacturer,our export percentage is more than 95% and the overseas market extends to Europe, America, Asia, Australia and Africa.With advanced technology,standard workshops and modern management, SIYING always offer our clients a variety of products, ensuring high quality and the best service.

Welcome your visitation!

SIYINGLED




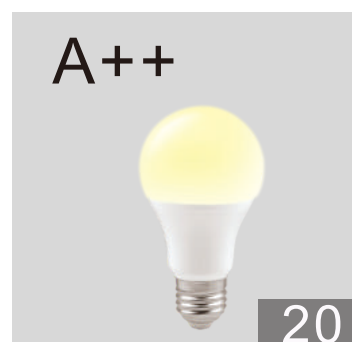



Smart Home


Bluetooth Control Smart LED Bulb

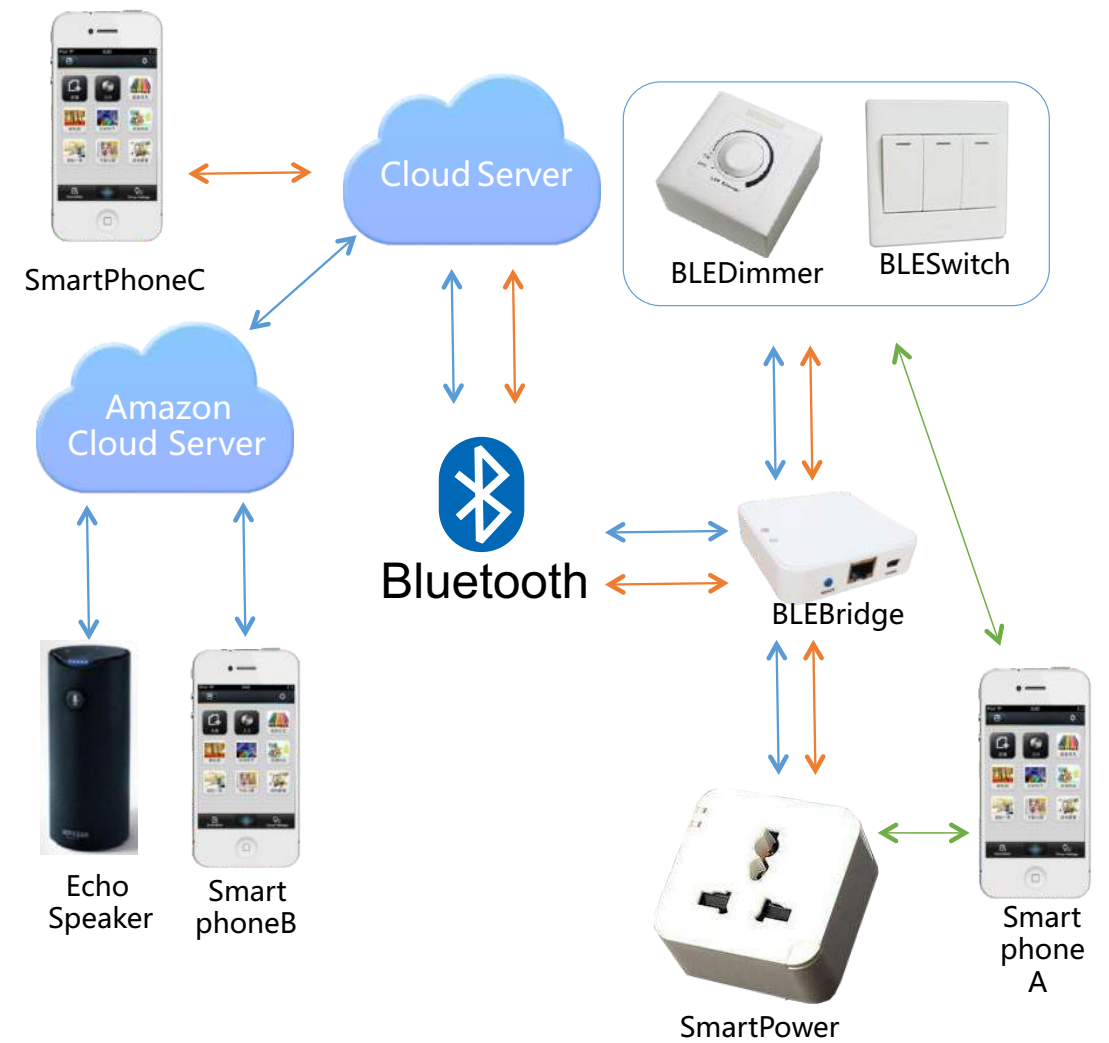

Feature

- Model:G45 C37 A60 GU10
- Color:16 million colors
- 24/7,365 day scheduling
- Countdown feature
- Room Group

Model	Code	W	V	lm
G45	SYBTB-01	5W	100-240V	400LM
C37	SYBTB-02	5W	100-240V	400LM
A60	SYBTB-03	7.5W	100-240V	600LM
GU10	SYBTB-04	5W	100-240V	400LM

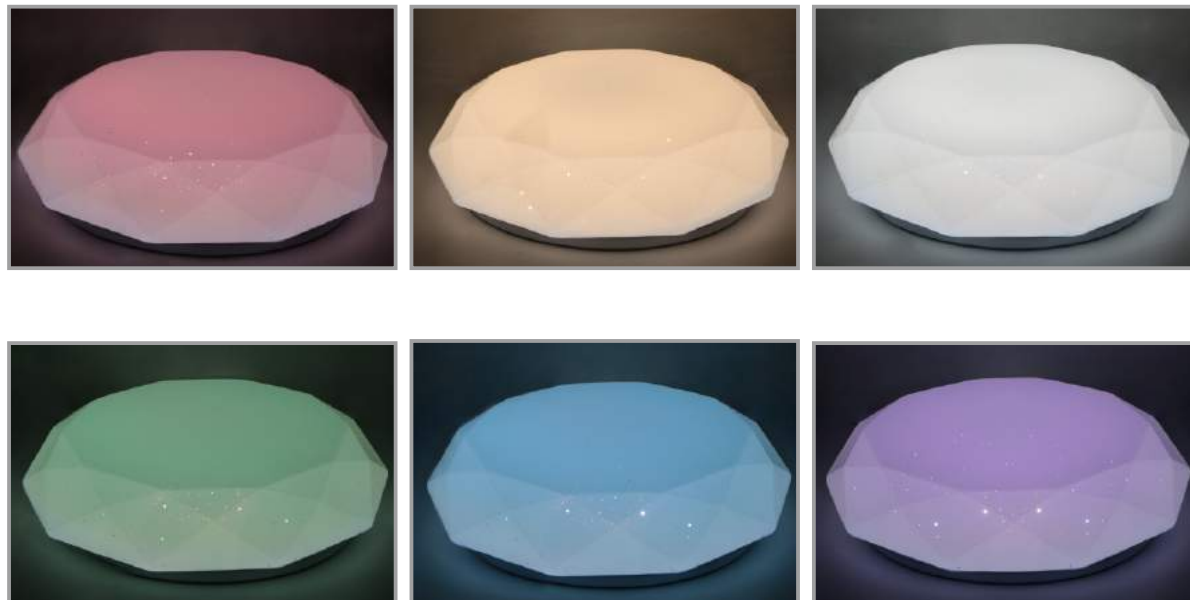

Bluetooth Control Smart LED Ceiling Light



Smart Home



Code	W	V	lm	Size(mm)
SYCLBT-01	24W	100-240V	1560LM	φ250*85



Code	W	V	lm	Size(mm)
SYFLBT-01	10W	220-240V	500LM	L133*W120*H30
SYFLBT-02	30W	220-240V	1500LM	L192*W190*H30
SYFLBT-03	50W	220-240V	2500LM	L228*W255*H31



RGB+W Control Dimmable LED Bulb

Feature

- Model:A60 RGB+W
- Color:16 colors
- Control range:5-8m
- CCT:3000K 4000K 6500K

Code	W	V	lm	Size
SYRGBW-01	7W	100-240V	560LM	φ60*110
SYRGBW-02	9W	100-240V	720LM	φ60*119



RED



GREEN



BLUE



CCT-Dimmable Control LED Bulb

Feature

- Model:A60 CCT-Dimmable Control
- Dimmable range:10%~100%
- Color temperature range:2700k~6500k
- Control range:5-8m

Code	W	V	lm	Size
SYCCTD-01	7W	100-240V	560LM	φ60*110
SYCCTD-02	9W	100-240V	720LM	φ60*119



2700K

Warm white 2700K



4000K


Natural white 4000K



6500K

Cool white 6500K





100%



50%



10%

3-Step CCT Change

Model	Code	W	V	lm	Base	Size(mm)
G45	SY3DB-01	5W	170-250V	400LM	E14/E27	φ45*85
C37	SY3DB-02	5W	170-250V	400LM	E14/E27	φ37*108
A60	SY3DB-03	7W	170-250V	560LM	E27/B22	φ60*110
A60	SY3DB-04	9W	170-250V	720LM	E27/B22	φ60*110
GU10	SY3DB-05	5W	170-250V	400LM	GU10	φ50*56
Ceiling lamp	SY3DC-01	12W	170-250V	960LM	/	φ250*85
Ceiling lamp	SY3DC-02	18W	170-250V	1440LM	/	φ350*100
Ceiling lamp	SY3DC-03	24W	170-250V	1680LM	/	φ400*110



2700K




4000K




6500K

3-Step Dimming

Model	Code	W	V	lm	Base	Size(mm)
G45	SY3CB-01	5W	220-240V	400LM	E14/E27	φ45*85
C37	SY3CB-02	5W	220-240V	400LM	E14/E27	φ37*108
A60	SY3CB-03	7W	220-240V	560LM	E27/B22	φ60*110
A60	SY3CB-04	9W	220-240V	720LM	E27/B22	φ60*110
Ceiling lamp	SY3CC-01	12W	170-250V	960LM	/	φ250*85
Ceiling lamp	SY3CC-02	18W	170-250V	1440LM	/	φ350*100
Ceiling lamp	SY3CC-03	24W	170-250V	1680LM	/	φ400*110

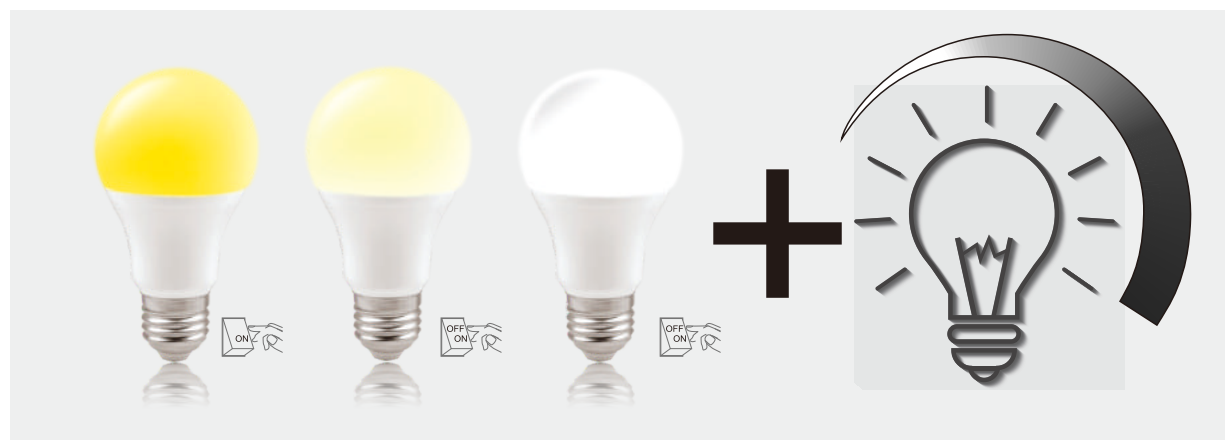

CCT control



3-Step CCT Change + Dimmable

Model	Code	W	V	lm	Base	Size
G45	SY3CDB-01	5W	170-250V	400LM	E14/E27	φ45*85
C37	SY3CDB-02	5W	170-250V	400LM	E14/E27	φ37*108
A60	SY3CDB-03	7W	170-250V	560LM	E27/B22	φ60*110
A60	SY3CDB-04	9W	170-250V	720LM	E27/B22	φ60*110
GU10	SY3CDB-05	5W	170-250V	400LM	GU10	φ50*56





Light Sensor LED Bulb

Feature

- Delay time:30-45s
- Light up: environment brightness lower than 10 lux
- Light off:environment brightness higher than 40 lux

Model	Code	W	V	lm	Base	Size
A65	SYLSB-01	7W	170-250V	560LM	E27/B22	φ6 5*110
A65	SYLSB-02	9W	170-250V	720LM	E27/B22	φ6 5*110

Microwave Sensor LED Bulb

Feature

- Induction range:5-8m
- Delay time:30-45s
(can change top to 2 mins)
- Light up: environment brightness lower than 10 lux with human motion

SYMSB-01: ☀ 0%--> ☀ 100%

SYMSB-S01: ☀ 10%--> ☀ 100%



Model	Code	W	V	lm	Base	Size
A60	SYMSB-01/S01	7W	170-250V	560LM	E27/B22	φ60*110
A60	SYMSB-02/S02	9W	170-250V	720LM	E27/B22	φ60*110
A60	SYMSB-03/S03	12W	170-250V	960LM	E27/B22	φ60*119

Sound light control Sensor LED Bulb

Feature

- Delay time:30-45s
(can change top to 2 mins)
- Light up: environment brightness lower than 10 lux with human motion




Model	Code	W	V	lm	Base	Size
A60	SYSLSB-01	7W	170-250V	560LM	E27/B22	φ60*110
A60	SYSLSB-02	9W	170-250V	720LM	E27/B22	φ60*110
A60	SYSLSB-03	12W	170-250V	960LM	E27/B22	φ60*119

Solar LED Bulb

Note

·When charging the lamp, place the solar panel in a sunny place to charge it

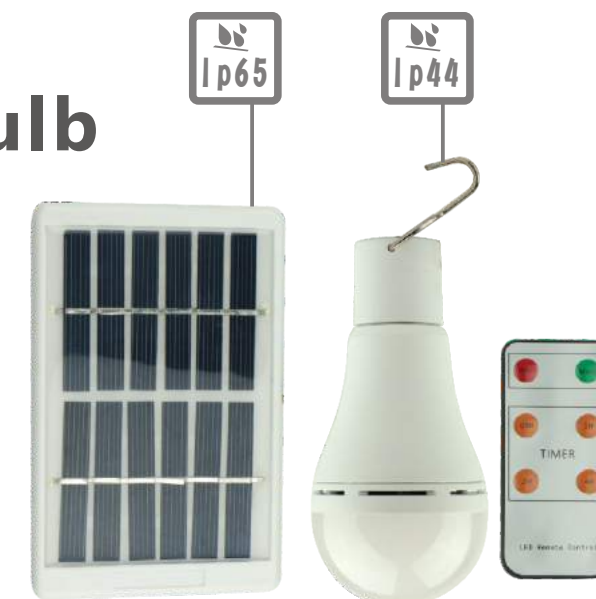

Model	Code	W	V	lm			Size(mm)
A60	SYSLB-01	7W	DC/5-6V	230LM	6-8hours	8hours	φ60*125
A70	SYSLB-02	9W	DC/5-6V	280LM	6-8hours	8hours	φ70*140

Emergency LED Bulb

Feature

- Emergency bulb works as normal bulbs as power on
- Light up still after blackout
- Switch control on/off



Model	Code	W	V	lm	Base		Size(mm)
A60	SYLSB-01	5W	170-250V	400LM	E27/B22	5hours	φ60*122
A70	SYLSB-02	7W	170-250V	560LM	E27/B22	5hours	φ70*145
A80	SYLSB-03	9W	170-250V	680LM	E27/B22	5hours	φ80*159




LED Bulb Ra95



Healthy Light

Ra=98.3

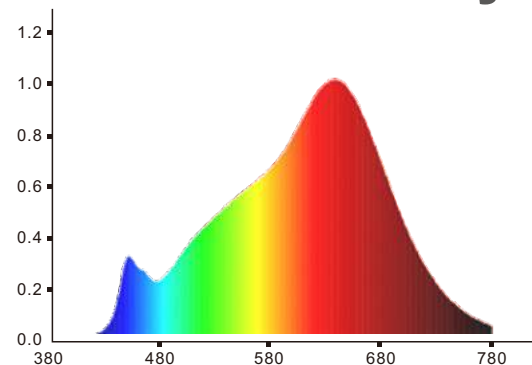

Full Spectrum
Lighting

R1=99 R2=100 R3=98 R4=99 R5=99 R6=98 R7=98
R8=97 R9=93 R10=99 R11=98 R12=87 R13=99 R14=98 R15=98




For baby care



For eyesight protection

The LED lamp Energy class is Class A++

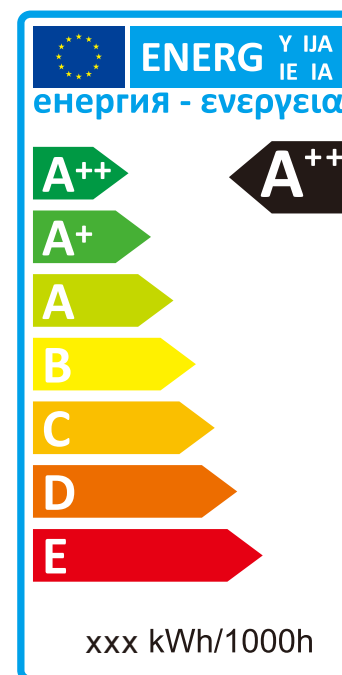

- Save Energy
- Protect the environment



